


LED LIGHTING



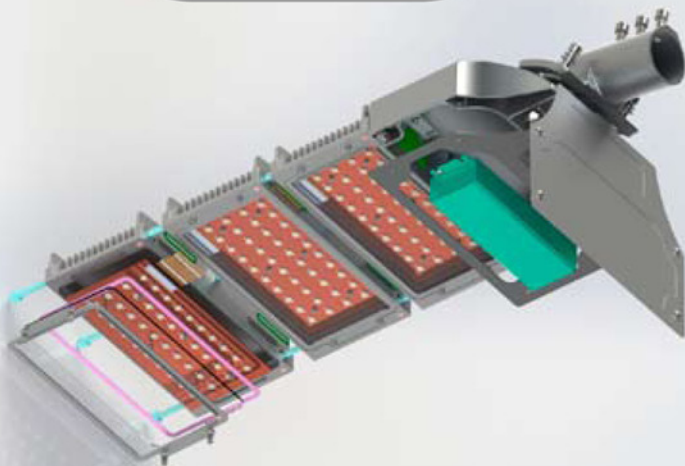

Karakteristike ulične svetiljke

Modularna svetiljka sa 1, 2 ili 3 modula

Montaža na liru prečnika od 48 do 60 mm

Podešavanje ugla u rasponu od 15°

Kućište od Al legure livene pod pritiskom

Zaštita poliuretanskim prahom, fina tekstura

Elementi za spajanje od nerđajućeg čelika

Protektor od sigurnosnog stakla, sa faktorom gubitaka 0,93

IP65 stepen mehaničke zaštite (u pripremi IP66 za drajver i IP67 za optički blok)

IK08 stepen zaštite od udara

MD40 – 463×300×125 mm

MD80 – 604×300×125 mm

MD120 – 745×300×125 mm

Napajanje: 110 – 240 VAC / 50 – 60Hz

Klasa izolacije: I

Faktor snage: 0,95

Snaga: 40 – 180 W

Snaga izvora: 60 W max po modulu

60 LED izvora po modulu, sa i bez sočiva

Efikasnost svetiljke u rasponu od 95 do 105 Lm/W

Efikasnost izvora svetlosti u rasponu od 130 Lm/W do 148 Lm/W

CCT i CRI po zahtevu (max CRI 93)



Temperatura ambijenta: -20 do +45°C

Mogućnost ugradnje daljinskog upravljanja (dodatno kućište za ugradnju elektronike, opciono)

Težina: 7,9 kg (MD 40S/MD 40SS), 9,9 kg (MD 80S/MD 80SS),

12,6 kg (MD 120S/MD 120SS),





SVETILJKA MD 80S/MD 80SS

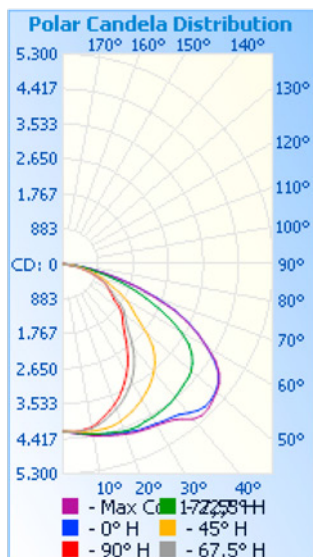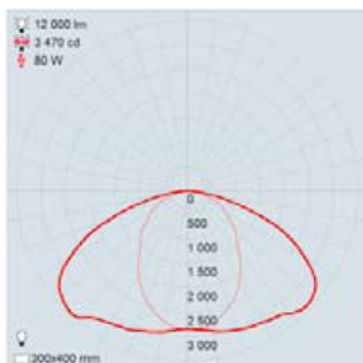

ISO 9001



SVETILJKA MD 120S/MD120SS

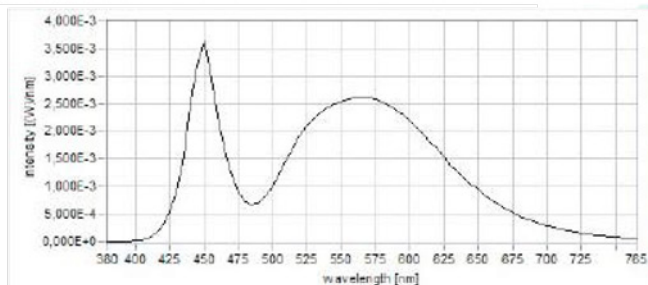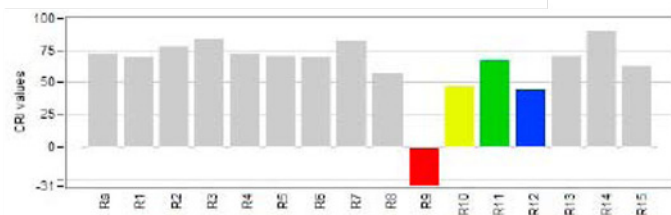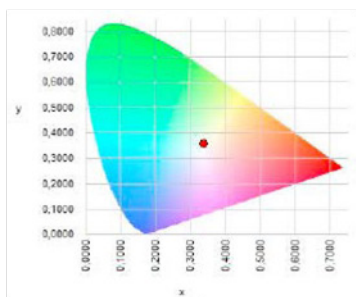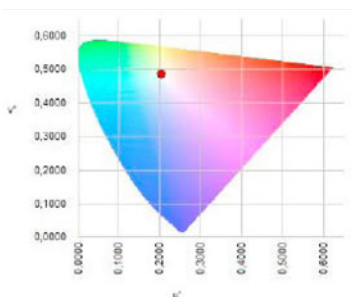

EC-Conformity Declaration




SVETILJKA ZA BILBORD



SVETILJKA ZA PROIZVODNI I MAGACINSKI PROSTOR
sa istim svetlosnim i elektricnim karakteristikama kao kod
ulične svetiljke



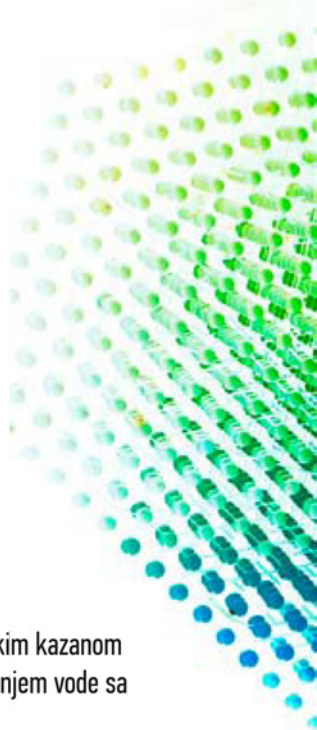

Proizvodni program

- električni bojleri TALAS sa prohromskim kazanom
- bojleri TALAS sa kombinovanim grejanjem vode sa prohromskim kazanom
- podni bojleri TALAS sa kombinovanim grejanjem vode sa prohromskim kazanom (električni grejač i jedan ili dva prohromska izmenjivača toplote)
- emajlirani bojleri
- prohromske cevi (inox cevi)
- grejači za radijatore i sušače peškira – tipa GT i GTX
- prohromske hidroforske boce
- prohromski kazani za sve modele bojlera drugih proizvođača
- svetiljke sa LED izvorima svetlosti, za uličnu rasvetu, unutrašnji prostor, bilborde...

ELIT INOX DOO

Milutina Mandića 2

32000 Čačak

+381 32 55 89 444

+381 32 55 89 251

+381 32 55 89 437

www.elitinox.co.rs